

Product Data

Static Dissipative Floor Paint

Code : 5700 Series

Pro-Pack Materials Pte Ltd

Blk 970, Toa Payoh North, #04-18
Toa Payoh Industrial Estate
Singapore 318992

Tel : +65 63541511
Fax : +65 63541711
Email : sales@pro-pack.com.sg
Website : www.pro-pack.com.sg

Regional Offices :

Malaysia
Bold Pack Industries Sdn Bhd

Indonesia
PT Pro-Pack Industries

Thailand
Bold-Pack Materials (Thai) Co. Ltd

Philippines
Pro-Pack Materials (Philippines) Inc.

India
Pro-Pack Materials India Pvt Ltd

China
Pro-Pack Materials (Wuxi) Co., Ltd



Description

People normally don't associate luxury with static protection with Staticide Premium ESD Paint it is exactly what to expect: reliable static control with opulent paint properties. This select grade of ESD paint is hand crafted with the finest materials for quality control consistent static protection convenience and beauty.

This one-part system is an economical alternative to ESD epoxy or ESD tile that will save in material and labor costs. Trouble-free to install and maintain; this full body paint allows for effortless mixing and application. Its rich viscosity ensures even distribution of conductive material and supreme coverage that leaves a nice sheen. Use the Staticide Premium ESD Paint alone or increase surface durability with a thin layer of 4600 Ultra dissipative floor finish.

Designed for interior concrete floors polyurethane paint offers a bright color palette that is perfectly suited for electronics manufacturing areas (EPAs) where people spend a lot of time and need static control. The light colors can be used to designate a particular work space or to reflect light to create a more cheerful work environment.

Features

- Water - Based Polyurethane
- Non-Hazardous
- Non-Flammable
- Biodegradable
- Static Dissipative
- Conforms to ESDA ANSI Standard S20.20-2007

Easy to Use

Stir and mix before using. Must be applied to a clean dry surface. New concrete floors should be primed with compatible concrete sealer

Maintenance

Sweep or dust mop daily (do not use sweeping compound). Damp mop weekly using water. Remove spills immediately. Do not machine buff floor. Coating may be touched up with additional coats.


Product Data

Static Dissipative Floor Paint

Code : 5700 Series



Available in a variety of colours

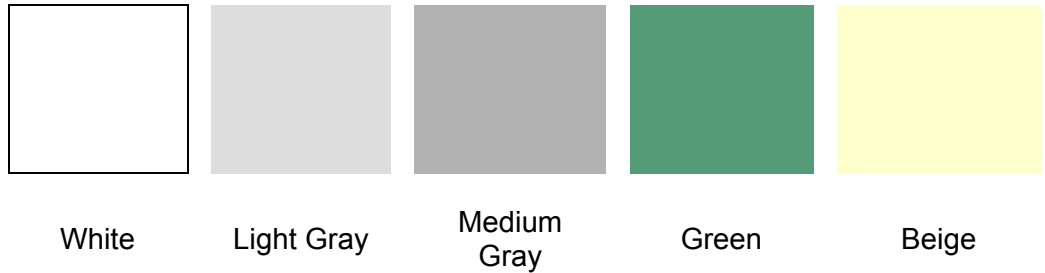

Physical Properties

| | |
|--------------------------|---|
| Coverage | : 250 - 300 square feet per gallon at 2 mils |
| Dry time | : 12-24 hours for moderate foot traffic; 7 days for full cure |
| Gloss Value at 60° angle | : 20+% |
| HMIS rating | : 2- 1- 0 - C |
| Material | : Water-based polyurethane |
| Resistivity | : 10E6 - 10E8 ohms per square average |
| Solvent resistance | : MEK double rubs |
| Static Decay | : <0.03 sec. per FTMS 101B, Method 4046 |
| Viscosity | : 90 - 150 seconds at 77 F (25 C) |
| VOC | : < 3 lbs/gal |
| Weight | : 9.6 - 10 lbs / gallon |

Pro-Pack Materials Pte Ltd

Blk 970, Toa Payoh North, #04-18
Toa Payoh Industrial Estate
Singapore 318992

Tel : +65 63541511
Fax : +65 63541711
Email : sales@pro-pack.com.sg
Website : www.pro-pack.com.sg

Regional Offices :

Malaysia

Bold Pack Industries Sdn Bhd

Indonesia

PT Pro-Pack Industries

Thailand

Bold-Pack Materials (Thai) Co. Ltd

Philippines

Pro-Pack Materials (Philippines) Inc.

India

Pro-Pack Materials India Pvt Ltd

China

Pro-Pack Materials (Wuxi) Co., Ltd