


## Product Data

Tile, Static Dissipative PVC  
Floor, HK RAIAN


Model : HK Series

Code : 7001 Series


HK - 1101




HK - 1102




HK - 1103




HK - 1104



HK - 1105




HK - 1106




HK - 1107




HK - 1108




HK - 2203




HK - 2204



HK - 2205



HK - 2206



	Properties	HK RAIAN
Floor Classification	Classification EN 685 / EN649	Class 34 ± 43
	NFPA Life Safety Code 101	Class 1 Interior Floor Finish
	Standard Specification for Solid Vinyl Floor Tile ASTM F 1700-99	Passed
	Fulfill Product Requirement	Passed
	EN 649 / SS-T-312B	

### Pro-Pack Materials Pte Ltd

Blk 970, Toa Payoh North, #04-18  
Toa Payoh Industrial Estate  
Singapore 318992

Tel : +65 63541511  
Fax : +65 63541711  
Email : sales@pro-pack.com.sg  
Website : www.pro-pack.com.sg

Regional Offices :

#### Malaysia

Bold Pack Industries Sdn Bhd

#### Indonesia

PT Pro-Pack Industries

#### Thailand

Bold-Pack Materials (Thai) Co. Ltd

#### Philippines

Pro-Pack Materials (Philippines) Inc.

#### India

Pro-Pack Materials India Pvt Ltd

#### China


Pro-Pack Materials (Wuxi) Co., Ltd

## Product Data

Tile, Static Dissipative PVC  
Floor, HK RAIAN

Model : HK Series

Code : 7000 Series

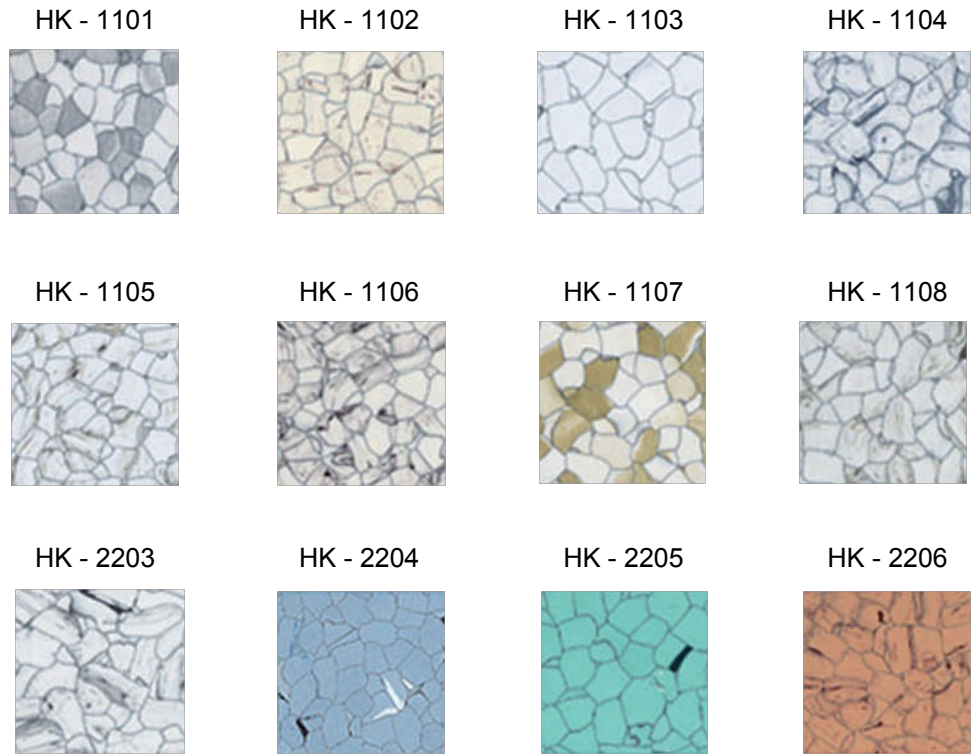

### Pro-Pack Materials Pte Ltd

Blk 970, Toa Payoh North, #04-18  
Toa Payoh Industrial Estate  
Singapore 318992

Tel : +65 63541511  
Fax : +65 63541711  
Email : sales@pro-pack.com.sg  
Website : www.pro-pack.com.sg

Regional Offices :

**Malaysia**  
Bold Pack Industries Sdn Bhd

**Indonesia**  
PT Pro-Pack Industries

**Thailand**  
Bold-Pack Materials (Thai) Co. Ltd

**Philippines**  
Pro-Pack Materials (Philippines) Inc.

**India**  
Pro-Pack Materials India Pvt Ltd

**China**  
Pro-Pack Materials (Wuxi) Co., Ltd

	Properties	HK RAIAN		
Physical Features	Thickness EN 428 / ASTM-F-386	2 mm / 3 mm		
	Size EN 427 / ASTM-F-536	600 / 610 / 900 mm		
	Weight / M2 EN430	2 mm : 3.06 KG / M2 3 mm : 4.72 KG / M2		
	Dimensional Stability EN434 / DIN 51962 KS-M-3802	0.10 % < 0.30 %		
	Flexibility ASTM-F-137	No Crack		
	Squareness ASTM-F-540	600 x 600 / 610 x 610 : ± 0.30 mm 900 x 900 : ± 0.45 mm		
	Residual Indentation (150MIN) EN 433 / DIN 51955 / ASTM F 142	< 8.0 % 2.0 mm - 0.03 mm / 0.3 mm - 0.04 mm		
	Abrasion Resistance ASTM D-1044 (CS-10-F-Wheel , 500 GM Weight)	Cycles	% Gauge Loss	
		2,500	0.48	
		5,000	0.95	
	7,500	1.41		
	10,000	1.87		
	ASTM-D-4060	< 97 MG		
	Hardness (Shore D) ASTM-D-2240	< 85		
	Effect to caster chair EN 425	No Damage		


## Product Data

Tile, Static Dissipative PVC  
Floor, HK RAIAN


Model : HK Series

Code : 7000 Series


HK - 1101




HK - 1102




HK - 1103




HK - 1104



HK - 1105



HK - 1106




HK - 1107




HK - 1108




HK - 2203




HK - 2204



HK - 2205



HK - 2206



### Pro-Pack Materials Pte Ltd

Blk 970, Toa Payoh North, #04-18  
Toa Payoh Industrial Estate  
Singapore 318992

Tel : +65 63541511  
Fax : +65 63541711  
Email : sales@pro-pack.com.sg  
Website : www.pro-pack.com.sg

Regional Offices :

**Malaysia**  
Bold Pack Industries Sdn Bhd

**Indonesia**  
PT Pro-Pack Industries

**Thailand**  
Bold-Pack Materials (Thai) Co. Ltd

**Philippines**  
Pro-Pack Materials (Philippines) Inc.

**India**  
Pro-Pack Materials India Pvt Ltd

**China**  
Pro-Pack Materials (Wuxi) Co., Ltd

	Properties	HK RAIAN
<b>Electric Features</b>	Static Load Limit ASTM F-970	1500 PSI
	Electrical Resistance DIN 51953 EN 1081 IEC61340 EOS/ESD S7.1 ASTM F 150 / NFPA 99 / UL 779 (Listed No.22L9)	Static Dissipative $1 \times 10^6 < R < 1 \times 10^8 \Omega$ $R < 1 \times 10^8 \Omega$ $1 \times 10^6 < R < 1 \times 10^8 \Omega$ (DIF) $1 \times 10^6 < R < 1 \times 10^8 \Omega$ $1 \times 10^6 < R < 1 \times 10^8 \Omega$
	Electrostatic Propensity / Static Generation AATCC-134	< 100 V
	Static Decay Federal Test Method 101C, M4046 : 5000V T0 Zero MIL-B-81705C (5KV Decay Time / Sec)	< 0.02 Sec
<b>Resistance To Chemical</b>	Resistance To Chemical EN 423 / DIN 51958 / ASTM-F-925	Excellent ( Test Result Available )
<b>Fire Resistance</b>	Fire Resistance DIN 4102 / B 3810 / B 3800	Inflammable , Hard To Ignite
<b>Miscellaneous Features</b>	Smoke Density : ASTM E-662 / NFPA 258 Critical Radiant Flux : ASTM E-648 / NFPA 253 / DIN 51960 Flame Spread : ASTM E 84 / NFPA 225	Class 1 ( < 450 ) Class 1 ( > 1.00 W/M2 ) < 75
	Outgassing : ASTM E 595	Excellent (Test Result Available )
	Color Fastness ISO 105 B 02 / MET.3 - DIN 53389	5 - 6
	Ease Of Decontamination DIN 25415-1 / ISO 8690	Excellent
	Water Proof ASTM D 570, Water Absorption Of Plastics	< 0.15 %
	Recyclable	Yes