


Product Data

Roll, Antistatic PVC
Curtain

Code : 1506 Series

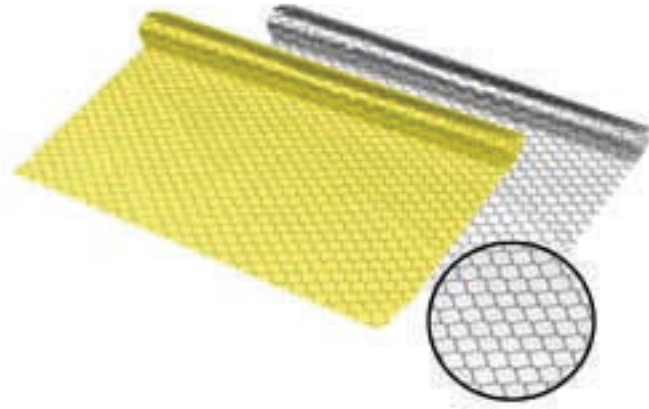

Properties		Front (grid) Side	Back	Unit	Test Method
Surface Resistivity		10 E5 to 10 E8	> 10 E11	ohm / Sq.m	ASTM D-257
Electrostatic Voltage		< 700	< 1200	voltage	Electro Static Field Meter
Decay time	5000 V - > 500 V	< 0.5	<0.5	sec.	MIL-B- 81705C
Tensile Strength	Length / MD	1.9		kg/mm2	ASTM D-882
	Width / TD	1.9		kg/mm2	
100% Moduls	Length / MD	1.1		kg/mm2	ASTM D-882
	Width / TD	1.8		kg/mm2	
Elongation	Length / MD	170		%	ASTM D-882
	Width / TD	210		%	
Heat Shrinkage	60°C x 30min in H2O	< 5		%	Internal Method

Size and Packing Information

Size	Thickness	0.3, 0.5, 0.8, 1.0, 1.5, 2.0	mm	-
	Width	30, 90, 100, 120, 137	cm	-
	Roll	10, 20, 30	m	-
Colour		Grid on clear transparency	-	-
Material of the film		PVC	-	-
Material of the core		Paper	-	-
Core Diameter		3	Inch	-

Pro-Pack Materials Pte Ltd

Blk 970, Toa Payoh North, #04-18
Toa Payoh Industrial Estate
Singapore 318992

Tel : +65 63541511
Fax : +65 63541711
Email : sales@pro-pack.com.sg
Website : www.pro-pack.com.sg

Regional Offices :

Malaysia

Bold Pack Industries Sdn Bhd

Indonesia

PT Pro-Pack Industries

Thailand

Bold-Pack Materials (Thai) Co. Ltd

Philippines

Pro-Pack Materials (Philippines) Inc.

India

Pro-Pack Materials India Pvt Ltd

China

Pro-Pack Materials (Wuxi) Co., Ltd