


## Product Data

Tape, Shielding

Code : 5205 Series

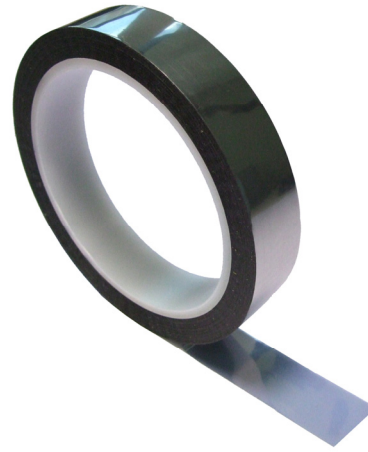

### Features

Non corrosive and durable to chemical

Used to shield electromagnetic waves and low static charge build-up

Low charge when removed or unrolled from surface

Use in cleanroom or electronic industry

### Applications

Sealing semi-conduct wafer containers

### Physical Properties

Film	Metal Plated Polyester		
Thickness	50	µm	ASTTM D-1000
Strength of adhesive	50	Gf / 25mm	ASTTM D-1000
Elongation	50	%	ASTTM D-1000
Breaking Strength	7	Kg / 25mm	ASTTM D-1000
Surface Resistance	$10^{10} - 10^{11}$	Ohm / sq	ESD S11.11
Static Generation			
Unwind From Tape Roll	< 200	V	30 % RH 23 °C
	< 100	V	50 % RH 23 °C
Remove From Surface	< 200	V	30 % RH 23 °C
	< 100	V	50 % RH 23 °C

#### Pro-Pack Materials Pte Ltd

Blk 970, Toa Payoh North, #04-18  
Toa Payoh Industrial Estate  
Singapore 318992

Tel : +65 63541511  
Fax : +65 63541711  
Email : sales@pro-pack.com.sg  
Website : www.pro-pack.com.sg

Regional Offices :

#### Malaysia

Bold Pack Industries Sdn Bhd

#### Indonesia

PT Pro-Pack Industries

#### Thailand

Bold-Pack Materials (Thai) Co. Ltd

#### Philippines

Pro-Pack Materials (Philippines) Inc.

#### India

Pro-Pack Materials India Pvt Ltd

#### China

Pro-Pack Materials (Wuxi) Co., Ltd