


PRODUCT INFORMATION

Product Description	Sticky Mat
Packing	240sheets/ctn (30sheets/pad, 8pads/ctn)
Product Code	5319-0011
Model Number	PPM 4001
Material Colour	Blue
Logo	With artwork "P" logo for each sheet(From top P1 to bottom P30)
Recommended Storage Condition	Temperature<20°C ,keep away from direct sunlight

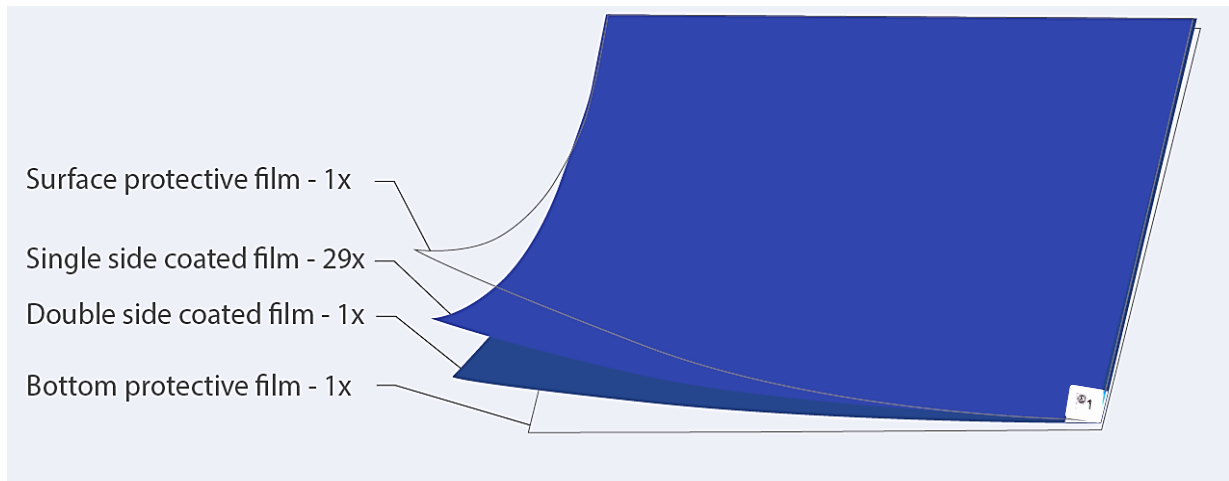

Numbering: Mark numbers (P1 to P30) on the 30 peel tags of the mat

PHYSICAL SPECIFICATION

No	Items	Specification	Tolerance
A	Length	1143mm (45")	±5mm
B	Width	660mm (26")	±5mm
C	Surface Protective Film- 1x	45um	±5um
D	Single Side Coated Film- 29x	40um	±5um
E	Double Side Coated Film- 1x	55um	±5um
F	Bottom Protective Film- 1x	45um	±5um
G	Total Pad Thickness	1.2mm	±0.1mm

CHARACTERISTIC

No	Item	Specification
1	Adhesive Strength- Surface	3.43 $\pm$ 0.49 N /25mm
		350 $\pm$ 50g /25mm
2	Adhesive Strength- Bottom	6.37 $\pm$ 0.49 N /25mm
		650 $\pm$ 50g /25mm
3	Adhesion	50g /25mm
4	Adhesive Thickness	0.005 $\pm$ 0.002mm
5	Sticky Power	1543GR/25mm
6	Colour	Blue
7	Tensile Strength (Longitudinal)	$\geq$ 20Mpa
8	Tensile Strength (Latitudinal)	$\geq$ 12Mpa
9	Tensile Strength with Adhesive (Longitudinal)	>100kg /cm ²
10	Elongation (Longitudinal)	>200%
11	Elongation (Latitudinal)	>300%
12	Persistent Adhesively	$\geq$ 600min
13	Heat Resistance	45°C $\pm$ 5°C
14	Anti-Aging Performance	240 H
15	180°C Peel Strength	0.12-0.13KN /m

MATERIAL SPECIFICATION

No	Item	Material/ Type
1	Sticky Sheet	Low Density Polyethylene (PE) Film
2	Glue Adhesive	Water-based Acrylic

CUSTOMER ACKNOWLEDGEMENT

Version	Revision Date	Pro-Pack Sales PIC (Name/ Signature)	Customer Acknowledgement (Name/ Signature)
C	2 Apr. 2024		