


Product Data

Static Dissipative PP Strap

Code : 5311 Series

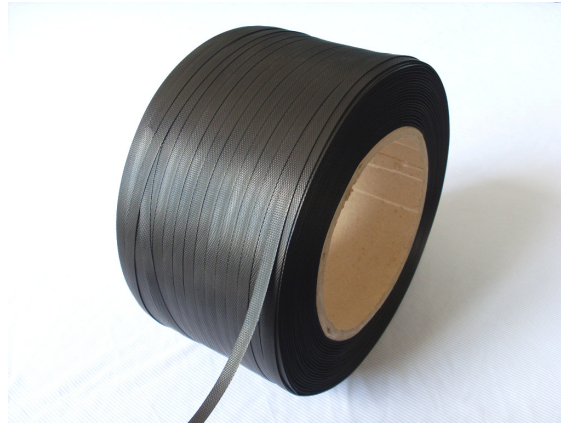

Description

Quality Polypropylene Strapping works great in table top, semi-automatic strapping machine applications. Strapping is embossed for reduced splitting, greater flexibility and better seal joint efficiency in heat seal machine.

Specification

Material	: Conductive PP (Polypropylene Co-Polymer)	
Colour	: Black	
Surface Resistivity	: 10 e5 - 10 e9 Ohm/Sq	(EOS/ESDS11.11)
Decay Test	: Less than 2 second	(Mil-Spec 81705B)
Standard Width	: 12 mm +/- 0.5 mm	9 mm +/- 0.5mm
Thickness	: 0.65mm +/- 0.05 mm	
Length	: 1500 meter/ roll	
Tensile Strength	: 60 kg	
Core Size	18.5 cm (w)	
Outer Size	: 22.5 cm	
Heating	: 150 °C / 24Hrs	
Specific Weight	: 5.5 g/m	
Melting Point	: 180 +/- 5 °C	

Pro-Pack Materials Pte Ltd

Blk 970, Toa Payoh North, #04-18
Toa Payoh Industrial Estate
Singapore 318992

Tel : +65 63541511
Fax : +65 63541711
Email : sales@pro-pack.com.sg
Website : www.pro-pack.com.sg

Regional Offices :

Malaysia
Bold Pack Industries Sdn Bhd

Indonesia
PT Pro-Pack Industries

Thailand
Bold-Pack Materials (Thai) Co. Ltd

Philippines
Pro-Pack Materials (Philippines) Inc.

India
Pro-Pack Materials India Pvt Ltd

China
Pro-Pack Materials (Wuxi) Co., Ltd