

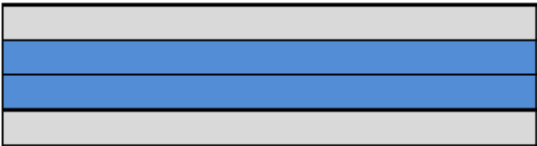
## PRODUCT INFORMATION

<b>Product Description</b>	AS Laminating Film Clear A4
<b>Product Code</b>	5392-0006
<b>Packing</b>	1000pcs/ctn

## FEATURES

- Good Transparency
- Static Dissipative processed with durability
- Resistance against chemical
- Strict quality control
- Good performance in Laminating
- Exhibition semi-permanent anti-static electricity
- No Migration

## CONSTRUCTIONS

	----- Anti-static treatment PET Film (50μm)
	----- PP Hotmelt (50μm)
	----- PP Hotmelt (50μm)
	----- Anti-static treatment PET Film (50μm)

## PHYSICAL PROPERTY

Properties		Unit	Values		Test Method
Thickness	Base	μm	50 ± 2	100 ± 5	
	PP Hotmelt	μm	50 ± 3		
Color			Clear / Light Grey		
Total Thickness		μm	200 ± 10		
Surface Resistance	Before laminating	Ω	MAX.10E6		ASTM D257
	After laminating		MAX.10E6		
Electrostatic Discharge		sec	MAX. 0.1		
Peeling static voltage		V	MAX. 50		
Size			A4		

**CUSTOMER ACKNOWLEDGEMENT**

<b>Version</b>	<b>Revision Date</b>	<b>Pro-Pack Sales PIC (Name/ Signature)</b>	<b>Customer Acknowledgement (Name/ Signature)</b>
A	02 Oct 2024		